


Thermal Stripper - Data Sheet

The Jonard Thermal Strippers are compact, easy-to-use fiber stripping units designed to thermo-mechanically remove coatings from optical fibers. The heater is adjustable up to 200°C; far hotter than any competing product. This feature facilitates stripping extremely difficult and baked-on coatings and in some cases can even remove fluoroacrylate undercoatings. Our TSFB-125 Fixed Blade Thermal Stripper supports standard 125µm optical fibers, including 250µm, 400µm, and 900µm coated fibers. Adjustable temperature and time settings allow it to adapt to stripping a variety of different coatings. The precision, self-centering blade design produces high strength stripping performance unmatched by previous flat blade strippers.

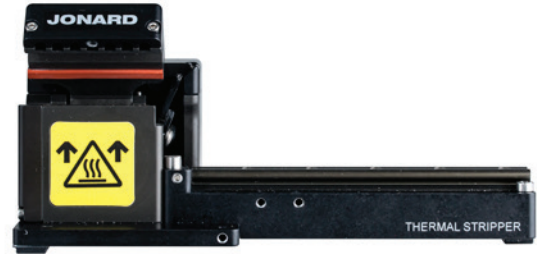

TSFB-125

FEATURES:

- Compact, low-maintenance bench top design.
- Fixed Blade version supports standard 125µm acrylate coated fiber with buffer diameters up to 900µm.
- Adjustable temperature and time settings to accommodate different fiber coatings.

INCLUDES:

- Power Supply Cord
- Cleaning Brush

For Fitel, Fujikura & Ericsson fiber holders use the corresponding platforms, for LDF and all others without fiber holders use the Jonard Universal Clamp. Note, Platforms sold separately.



TSPE-125

This Style Platform is designed to accommodate the Ericsson style fiber holder.



TSPF-125

This Style Platform is designed to accommodate Fitel/Fukijura Style fiber holders.



TSUC-40

Use the Jonard Universal Clamp to accommodate LDF styles, and for users who do not have a fiber holder.

SPECIFICATIONS				
PART NO.	TSFB-125	TSPE-125	TSPF-125	TSUC-40
BLADE TYPE	Fixed			
ADJUSTABLE HEAT TIME RANGE	0-30 seconds (2 second increments)			
ADJUSTABLE TEMPERATURE RANGE	60-200° C, or ambient			
SUPPORTED FIBER BUFFERS	250-900µm			
SUPPORTED FIBER TYPES	125µm cladding			
EXTERNAL POWER SUPPLY	100-240V AC, 47-63Hz			
DIMENSIONS	129.5mm (W) x 73.5mm (D) x 71mm (H) (5.1" x 2.9" x 2.8")			
WEIGHT	2.557 lbs	0.078 lbs	0.07 lbs	0.12 1 lbs
UPC NO.	811490011236	811490011250	811490011267	811490011274